
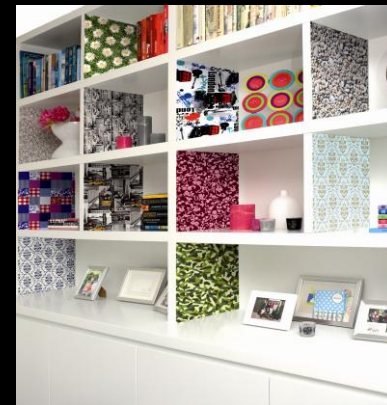


SELFADHESIVE FOIL STANDARD

CONSTRUCTION

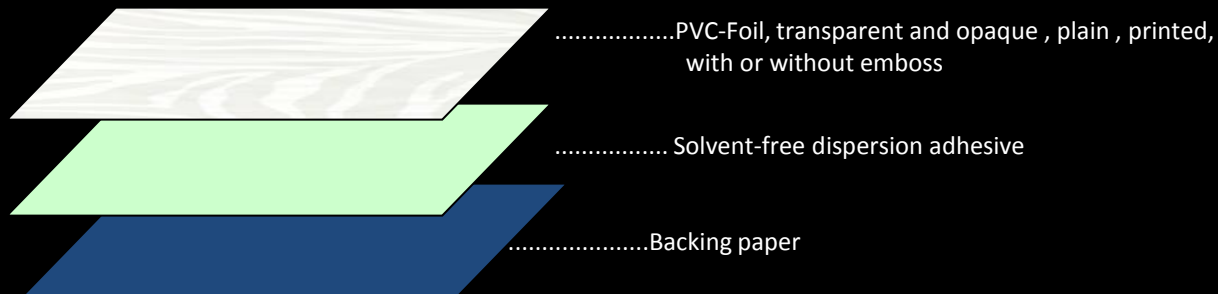

Technical specs:

Thickness:

-Foil with paper	170-200 Micron + 10%
-Base foil	~90-100 Micron + 10% **
-Backing paper	67+3 Micron

Tensile strength:	vertical/horizontal>15N / mm ² DIN 53455
Elongation:	vertical>80% ; horizontal>150% DIN 53455
Hardness:	61+3 Shore D (Foil with 90 Micron) 58+3 Shore D (Foil with 100 Micron)

Weight :

-Foil with paper	204-230 g/m ²
-Foil	110-150 g/m ²
-Adhesive (solvent-free)	20+2 g/m ²
- Backing paper	62-70 g/m ²

Shrinkage on window:	vertical 0% - +1% horizontal -0,5% - 0,5%
----------------------	--

Opacity:	>95%
Light fastness: (Wollblauskala)	min 6

Application temperature:	+5 C - +35C
Temperature resistance:	-10 C - +60 C

The above mentioned concern un-embossed designs

**Thickness depends on design
(Plain and wood = 100 Micron, other designs 90 Micron)